


PLAN

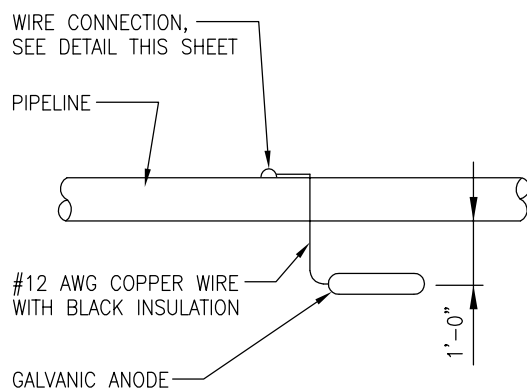


ELEVATION

GALVANIC ANODE INSTALLATION
FOR METALLIC PIPE
 NTS

NOTES:

1. COPPER SLEEVE REQUIRED FOR THERMITE WELDING OF #10 AWG AND SMALLER WIRE.
2. USE COPPER SLEEVE FOR THERMITE WELDING OF #4 AND #2 AWG JOINT BONDING WIRES.
3. WELDER AND CARTRIDGE SIZE VARIES ACCORDING TO SURFACE SHAPE, MATERIAL, AND HORIZONTAL OR VERTICAL SURFACE. CONSULT WELDER MANUFACTURER FOR RECOMMENDED WELDER AND CARTRIDGE.
4. FOR MULTIPLE WIRE CONNECTIONS TO PIPE SEPARATE THERMITE WELD WIRE CONNECTIONS BY ONE PIPE DIAMETER MINIMUM, 2'-0" MAXIMUM.
5. USE 15 GRAM MAXIMUM SIZE WELD CARTRIDGES FOR CONNECTIONS TO PETROLEUM AND NATURAL GAS PIPELINES OR STRUCTURES. WIRE CONNECTIONS SHALL BE AS SPECIFIED AND APPROVED BY THE OWNER.
6. COAT COMPLETED THERMITE WELD CONNECTIONS WITH ROYSTON HANDYCAP AND 747 PRIMER OR HEAT SHRINK AS SPECIFIED.

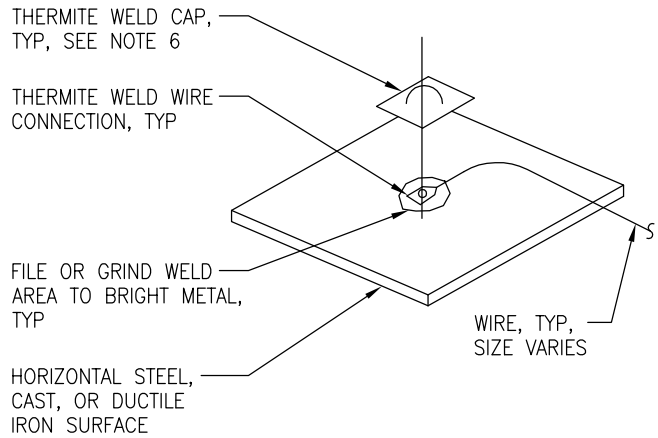

WIRE CONNECTION FOR
HORIZONTAL SURFACES
 NTS



**GALVANIC ANODE
 INSTALLATION**

DATE: 07-2017

DWG. TBR-8

APPROVED BY: _____ SDS
 DEVELOPMENT ENGINEER