


**ACP RESTORATION**

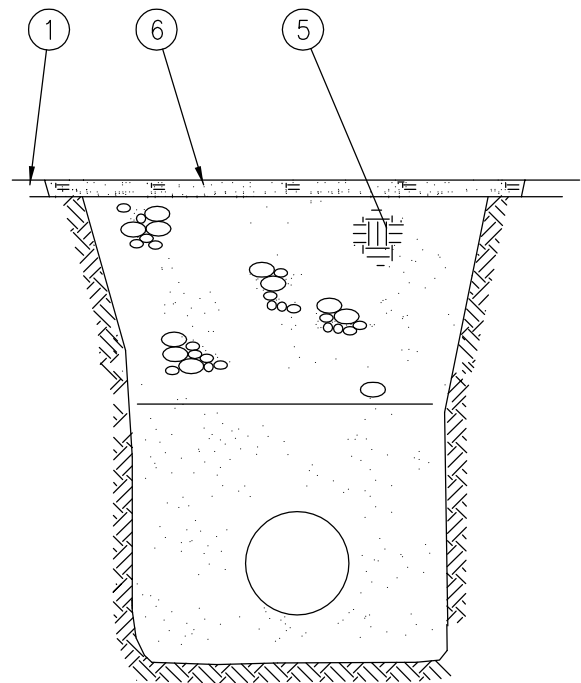

**UNPAVED  
SHOULDER AND  
PRIVATE EASEMENT**

- ① EXISTING SURFACE
- ② LONGITUDINAL TRENCH – 6" HMA CLASS 1/2" OR 2" HMA CLASS 1/2" + 4" HMA CLASS 1"  
TRANSVERSE TRENCH – 8" HMA CLASS 1/2" OR 2" HMA CLASS 1/2" + 6" HMA CLASS 1"
- ③ TRENCH BACKFILL OR CONTROL DENSITY FILL PER LOCAL JURISDICTIONAL REQUIREMENTS.
- ④ NEAT LINE ACP CUT. TACK EDGES WITH AR 4000 ASPHALT CEMENT. SEAL EDGES WITH AR 4000 ASPHALT CEMENT.
- ⑤ TRENCH BACKFILL.
- ⑥ RESTORE EXISTING SURFACE. TOP SOIL, CSTC (2" MINIMUM) OR AS NOTED ON PLANS.
- ⑦ 2" HMA CLASS 1/2" OVERLAY WHEN SPECIFIED ON PLANS OR REQUIRED BY THE JURISDICTIONAL AUTHORITY.

HMA= HOT MIX ASPHALT  
 AR= ASPHALT RUBBER  
 CSTC= CRUSHED SURFACE TOP COURSE  
 ACP= ASPHALT CONCRETE PAVEMENT

**NOTES:**

- 1. RESTORATION TO BE EXISTING CONDITION OR BETTER.
- 2. ALL WORK TO COMPLY WITH REQUIREMENTS OF LOCAL JURISDICTIONAL AUTHORITY.
- 3. IF PERMEABLE SURFACE IS REQUIRED, INSTALL OR REPLACE IN KIND ACCORDING TO JURISDICTIONAL REQUIREMENTS.



**TRENCH SURFACE RESTORATION**

DATE: 05-2017

DWG. TBR-2

APPROVED BY: DLH  
 DISTRICT ENGINEER